



L.B. WHITE

# PREMIER® DUCTABLE UNIT HEATERS



PREMIER®	80	80 DF	170	170 DF	350	350 DF
BTU/H RATING	80,000	80,000	170,000	170,000	175,000/350,000	350,000
HEATED AIR OUTPUT (CFM)	450	450	1,200	1,200	2,500	2,500
FUEL TYPE	LP	LP, NG	LP	LP, NG	LP	LP, NG
FUEL CONSUMPTION LP GAS MIN./MAX. (LBS./HR.)	3.7	3.7	7.9	7.9	8.1 / 16.2	16.2
FUEL CONSUMPTION NAT. GAS MAX (CU.FT./HR.)	-	80	-	170	-	350
TWO STAGE OUTPUT	-	-	-	-	YES	-
AMPS (STARTING/CONTINUOUS OPERATION)	5.0 / 1.5	5.0 / 1.5	7.3 / 5.0	7.3 / 5.0	25.0 / 9.0	25.0 / 9.0
AMPS (STANDARD 15 AMP CIRCUIT)	YES	YES	YES	YES	YES*	YES*
MOTOR HORSEPOWER	1/8	1/8	1/3	1/3	1	1
LENGTH (IN.)	29.5	29.5	32.3	32.3	48.3	48.3
WIDTH (IN.)	13.5	13.5	24.3	24.3	28.0	28.0
HEIGHT (IN.)	22.0	22.0	32.0	32.0	41.0	41.0
SHIPPING WEIGHT (LBS.)	79.0	79.0	161.0	161.0	320.0	320.0
CASE MATERIAL	TRI-SHIELD COATING**	TRI-SHIELD COATING**	TRI-SHIELD COATING**	TRI-SHIELD COATING**	TRI-SHIELD COATING**	TRI-SHIELD COATING**
WHEELS	-	-	NO FLAT	NO FLAT	NO FLAT	NO FLAT
FAN ONLY MODE	S	S	S	S	S	S
GAS PRESSURE REGULATOR (W/POL)	S	S	S	S	S	S
THERMOSTAT (WEATHERPROOF WITH 20' CORD)	S	S	S	S	S	S
GAS HOSE	15'	15'	15'	15'	15'	15'
DUCTING*** (12" OR 18" DIA. X 12' LENGTH)	GRAY-26346 LIGHT DUTY- 26348	GRAY-26346 LIGHT DUTY- 26348	GRAY-26346 LIGHT DUTY- 26348	GRAY-26346 LIGHT DUTY- 26348	GRAY-22835 LIGHT DUTY- 24442	GRAY-22835 LIGHT DUTY- 24442
U.S./CANADA CERTIFICATION	YES	YES	YES	YES	YES	YES

S=Standard 0=Optional

TWO YEAR WARRANTY

\*Amps spike over 15 during initial start-up. Check breaker capability

\*\* Tri-shield coating consists of 3 unique protective layers including: a non-corrosive hot-dipped galvanized steel, an oven-cured epoxy primer and baked, thermosetting polyester.

\*\*\* Gray, White, and Light Duty ducts are Optional. Premier 80 and 170 require the 12" diameter duct, and the Premier 350 requires the 18" diameter duct.

Part numbers listed. Duct part numbers differ on previously built models. Please call L.B. White for specific part numbers.



WORLD PROVIDER OF INNOVATIVE HEATING SOLUTIONS



411 Mason Street, Onalaska, WI 54650  
(800) 345 7200  
(608) 783 5691  
(608) 783 6115, fax  
www.lbwhite.com

© 2017 L.B. White Co.  
All rights reserved.  
All specifications are subject  
to change without notice.



# PREMIER<sup>®</sup> DUCTABLE UNIT HEATERS

PORTABLE, DEPENDABLE HEATERS USED FOR HUNDREDS OF APPLICATIONS.

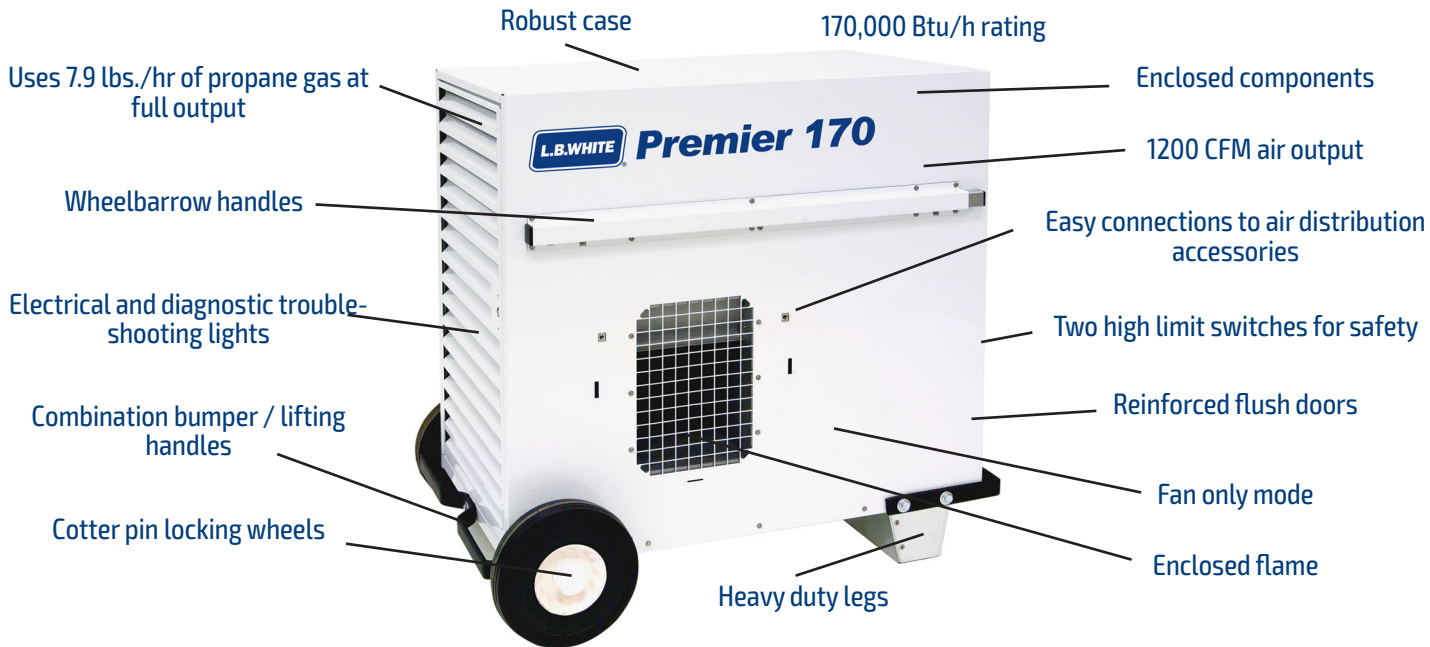

Dual fuel models switch fuels easily with simple valve turn

### COMES WITH:



### OTHER FEATURES INCLUDE:

- LP and dual fuel models available
- Versatile indoor and outdoor placement of heater
- Direct-fired = 99.97% fuel efficiency
- High volume of air output for maximum heat distribution
- Tri-shield finish provides superior protection against abrasion and corrosion
- Easy to transport
- CSA US and Canada



Great for heating and drying many applications including drywalling, framing, stucco work, construction enclosures, concrete work, brick and block laying, freeze protection, bridge work, docks, warehouses, excavation, etc., etc....

### OTHER SIZES AVAILABLE RANGING FROM 80K TO 350K BTU:



## WORLD PROVIDER OF INNOVATIVE HEATING SOLUTIONS

411 Mason Street, Onalaska, WI 54650  
 (800) 345 7200  
 (608) 783 5691  
 (608) 783 6115, fax  
 www.lbwhite.com

© 2017 L.B. White Co.  
 All rights reserved.  
 All specifications are subject  
 to change without notice.